

1) COMPATIBLE VEHICLE : MASERATI GHIBLI, QUATTROPORTE / 2013~CHRYSLER 300C
DODGE DARP, CHARGER

(1) HOW TO SET S/W MODE [(ON) 0 : ↓ off / (OFF) 1 : ↑ off]

Off	1	2	3	4	5	6	DIP_SW1 : OFF
On	ON						DIP_SW2, 3, 4 : OFF
							DIP_SW5 : 800 (BIG SCREEN) Off / 480 (SMALL SCREEN) On
							DIP_SW6 : On

(2) HOW TO SWITCH SCREEN



2) HOW TO SWITCH REAR VIEW CAMERA :

- REAR VIEW CAMERA DETECTION BY CAN (AUTOMATIC)
YOU MUST WIRE THE REAR VIEW CAMERA ACC DIRECTLY
TO THE INTERFACE' S ACC OUTPUT TO AVOID SCREEN NOISE.

[COMPONENTS]



Plug and Play

CONNECT TO THE ORIGINAL
MONITOR' S OUT

ORIGINAL
LVDS
CABLE



MAIN
CABLE




IR
SENSOR



LVDS
CABLE




R/C

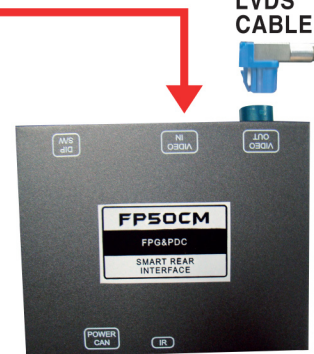

MAIN UNIT

(3) HOW TO ENTER THE REMOTE CONTROL SETTING MENU



PRESS **OK** ⁷ BUTTON 4TIMES THEN
YOU WILL SEE THE NUMBERS **1** ON THE
LEFT TOP OF THE SCREEN FROM 1~4,
WHEN IT' S NUMBER 4, PRESS THE
1 ¹ BUTTON TO ENTER THE SETTING MODE