



1) HOW TO SET S/W MODE [(ON,DOWN) 0 : ↓ off on / (OFF,UP) 1 : ↑ off on]


DIP_SW1,2,3			
* CAN-TYPE 1 (PDC X) *SELECT CAN TYPE IN REVERSE MENU*			
OFF	OFF	ON	A1 RESOLUTION 800
OFF	OFF	OFF	A4, Q5 2010, 2012, 2013, 2014 RESOLUTION 800
OFF	OFF	OFF	A4 2011, A6, A7, A8 2011~ RESOLUTION 800
OFF	ON	ON	Q3 2013 RESOLUTION 800
OFF	ON	ON	Q7 RESOLUTION 800
OFF	ON	OFF	Q7 RESOLUTION 800
SELECT CAN TYPE IN REVERSE MENU			
OFF	OFF	OFF	A4, Q5 2010, 2012, 2013, 2014 RESOLUTION 800
OFF	OFF	OFF	A4 2011, A6, A7, A8 2011~ RESOLUTION 800
OFF	OFF	ON	Q5, Q7 RESOLUTION 800
OFF	OFF	ON	Q3 RESOLUTION 800

DIP_SW4	REAR CAMERA SETTING
OFF	FACTORY REAR
ON	AFTERMARKET REAR
DIP_SW5	CAN SPEED
OFF	100K - LOW SPEED
ON	500K - HIGH SPEED
DIP_SW6	GEAR AUTO or STICK
OFF	STICK
ON	AUTO
DIP_SW7	RESOLUTION SETTING
OFF	800 X 480
ON	400 X 240
DIP_SW8	ON

2. HOW TO FRONT CAMERA (SETTINGS ON THE REAR SCREEN)

<p>A4, A5, A6, A7, A8</p> 	<p>2016 TT</p> 
<p>- VEHICLE : A4, A5, A6, A7, A8 PLEASE SET [FRONT CAMERA ON] ON IR MENU FRONT SCREEN WILL DISPLAY WHEN YOU PRESS [i NAV] BUTTON ON STEERING WHEEL.</p>	<p>- Vehicle : 2016 TT When using Front Camera, IR menu should be set on And press handle button once for Long. And then Screen exchange.</p>

3-1. HOW TO CONNECT LVDS CABLE

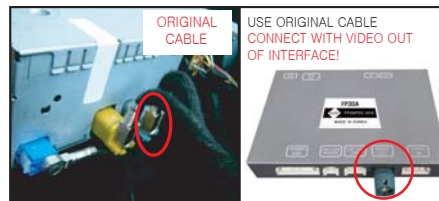


1) CONNECT ORIGINAL CABLE TO AUDI INTERFACE BODY [VIDEO OUT] SOCKET.




2) CONNECT GIVEN LVDS CABLE TO BOTH AUDI ORIGINAL SOCKET AND AUDI INTERFACE BODY [VIDEO IN] SOCKET.

3-2. HOW TO CONNECT LVDS CABLE(A3)

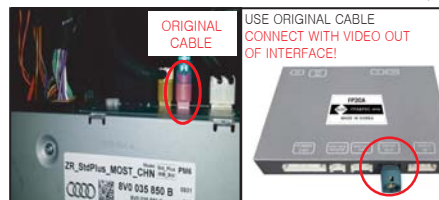


1) PLEASE USE ORIGINAL CABLE CONNECT WITH [VIDEO OUT] OF THE GOLF INTERFACE.

VEHICLE : A4, A5, A6, A7, A8, Q5

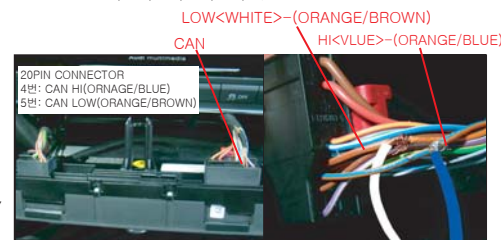


VEHICLE : Q3, Q5, Q7 (UNDER THE PASSENGER SEAT DRAWER)

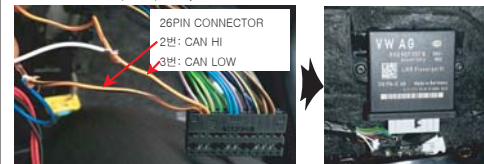


2) PLEASE USE OUR LVDS CABLE CONNECT WITH HEAD UNIT AND [VIDEO IN] OF OUR GOLF INTERFACE.

BACK OF HEAD UNIT



2016 GOLF



4. HOW TO ENTER TO IR SETTING MENU

[COMPONENTS]

